

Rapid Prototyping. Rapid Manufacturing. Rapid Tooling. Low-pressure RIM casting systems (RIM)


Polyurethane and Epoxy Resins

Boards and Blocks

Silicones

Auxiliaries

Our international distributors

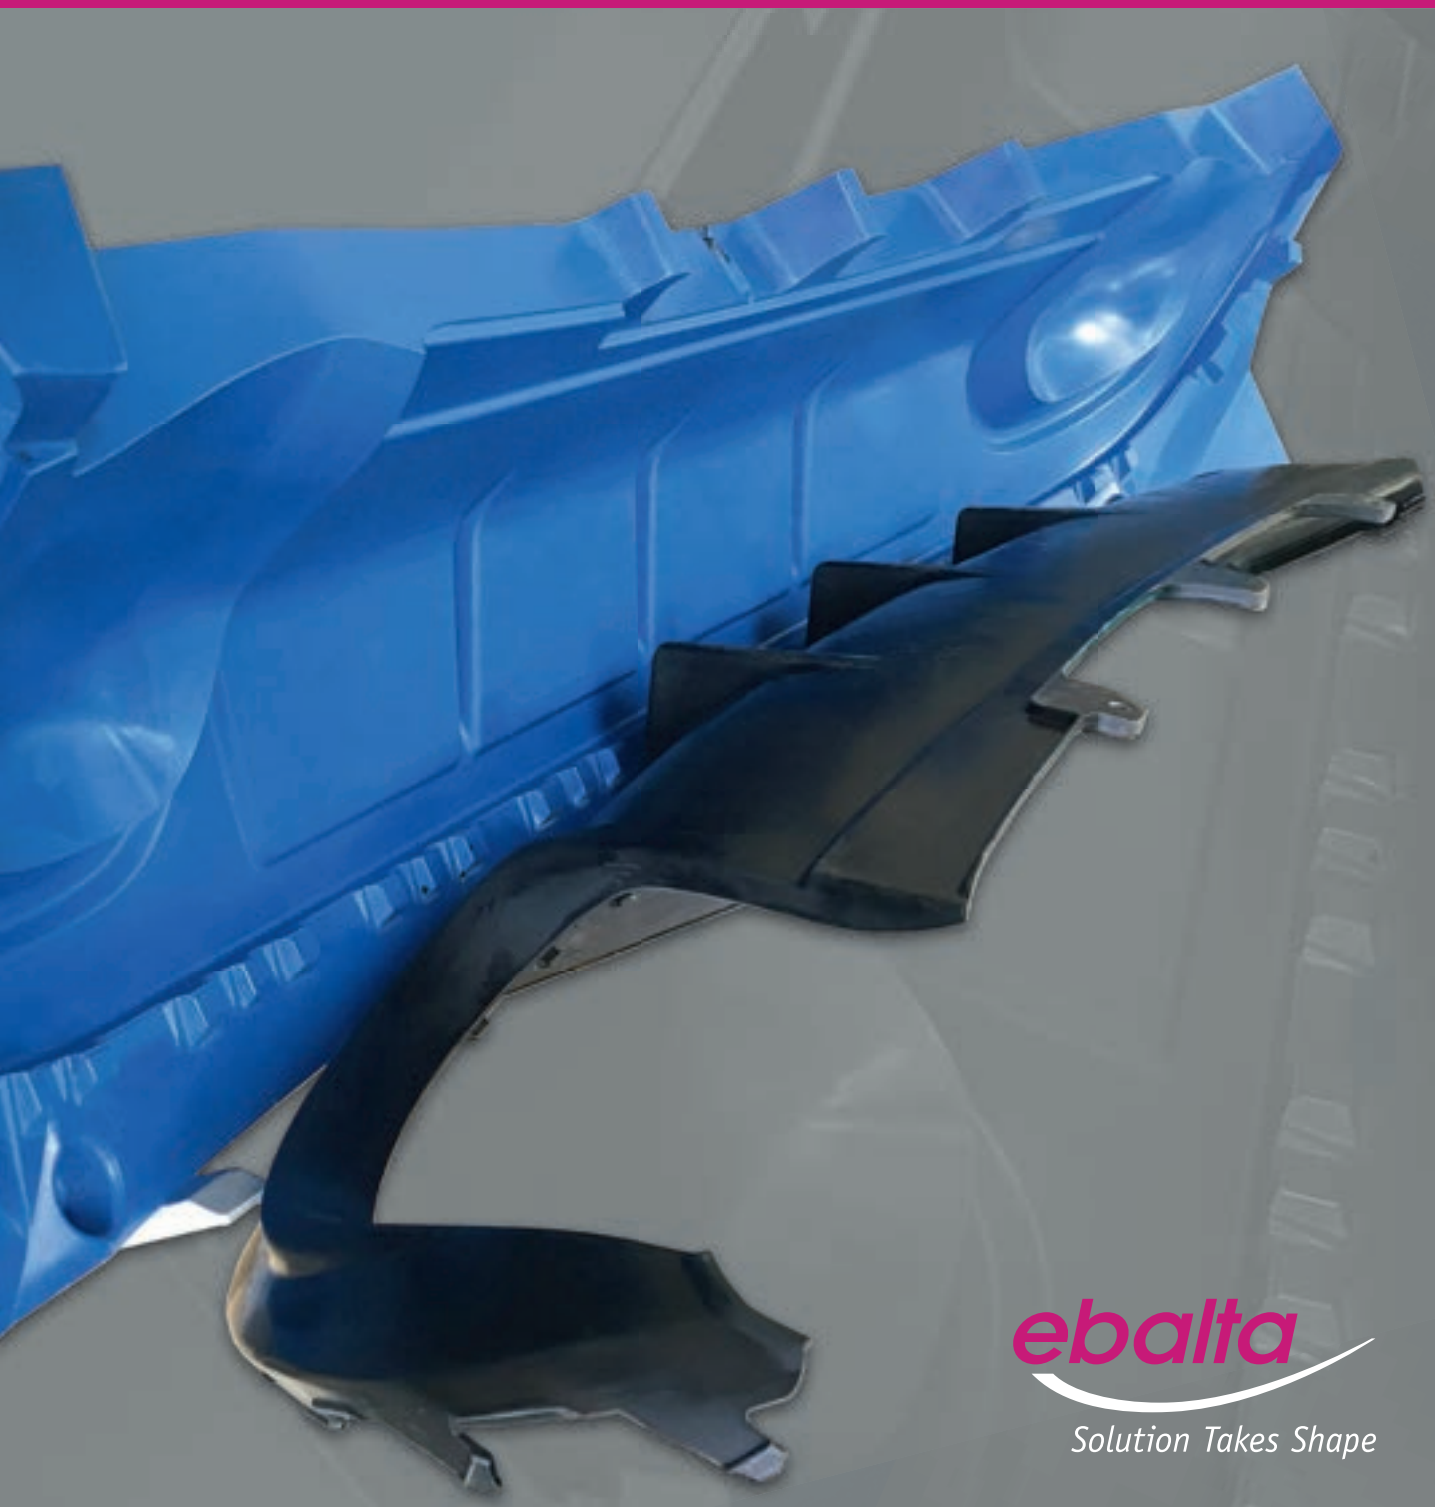

ebalta
Solution Takes Shape

Argentina

NOVARCHEM S.A.
Gral. Lavalle 5168,
Villa Martelli (1603),
Buenos Aires
Phone +54 11 47 09 75 85
E-Mail info@novarchem.com.ar

Australia

LMW Products & Services
PO Box 1255
Mitcham North
Victoria 3132
Phone +61 4 03 53 52 97
E-Mail wolfgang@lmwproducts.com.au

Austria / Croatia / Slovenia

FDW Handelsges. m.b.H.
8940 Liezen/Stmk.
Phone +43 3 61 22 55 75
E-Mail fdw@aon.at

Bulgaria

Hofmann Consult Bulgaria EOOD
Okolovrasten pat 66, 1415 Sofia
Phone +359 2 9 60 90 10
E-Mail office@hofmannconsult.net

Czech Republic

KTK Blansko, spol s r.o.
67907 Kotvrdovice 277
Phone +42 0 51 64 43 57 2
E-Mail trubackova@ebalta.cz

France

Bodo Möller Chemie France SAS
69250 Neuville Sur Saone
Phone +33 4 78 98 23 37
E-Mail m.sempere@bm-chemie.fr

Delta Résines

77950 Montereau Sur Le Jard
Mobile +33 6 01 35 30 32
E-Mail delta.resines@orange.fr

India

Electrocoating & Insulation Technologies Pvt.Ltd.
Hinjawadi, Pune 411057
Phone +91 20 22 93 32 35 / 22 93 31 37
E-Mail d.deshmukh@electrocoats.com

Indonesia

PT. TRIPURI MITRA NOBELINDO
Jakarta 11520
Phone +62 21 58 05 90 6
E-Mail samudra@tripuri.co.id

Italy

CAME S.r.l
Chemical and Mineral Engineering
Via Lepetit, 40, 20020 Lainate (MI)
Phone +39 02 96 44 65 20
E-Mail info@comesrl.eu

Roman Nello di Bocca

R. & Roman D. & C S.A.S.
C.so Novara 60/c
27029 Vigevano (PV)
Phone +39 0 38 12 38 53
E-Mail info@romannello.it
Area: shoe industry

The Netherlands

James Kunststof
7213 VW Gorssel
Phone +31 575 49 07 87
E-Mail paz35@hetnet.nl

Norway

Hans Claussen AS
Skuiveien 41
1339 Vøyenenga
Phone +47 671 19 400
E-Mail jonas.claussen@hc-as.no

People's Republic of China

EPTEK Tooling Materials (Shanghai) Co. Ltd.
Shanghai 201315
Mobile +86 18 61 63 39 45 6
E-Mail ocean@eptek.com

Shanghai Rocsky Trading Co. Ltd.

Electronic Equipment Co.Ltd.
Shanghai 201612
Phone +86 21 64 78 95 85
E-Mail groundjun@aliyun.com

Poland

Prec-Odlew Sp. z o.o.
32-050 Skawina
Phone +48 1 22 76 49 95
E-Mail prec@odlew.com.pl

Russia

LLC STANKI.RU Co.
107023 Moscow
Phone +7 495 7 81 55 11
E-Mail kami@stanki.ru

Republic of South Africa

Speciality Polymers S.A. (PTY) Ltd
Cape Town 7530
Phone +27 0 83 4 57 24 68
E-Mail gkoen@iafrica.com

Spain / Portugal

UNECO S.A.
08769 Castellvi de Rosanes Barcelona
Phone +34 93 3 83 47 11
E-Mail uneco@uneco.es

Sweden

ABIC Kemi AB
60006 Norrköping
Phone +46 11 14 90 30
E-Mail info@abic.se

Switzerland

Langer AG
4105 Biel-Benken
Phone +41 61 4 82 34 32
E-Mail info@langerag.ch

Tunisia / Algeria

ADCHEM
Advanced Chemistry S.A.R.L.
Immeuble Anbar N° 168 Avenue de Kouwait
Hammamet – 8050 Tunis
Tunisia
Phone +2 16 93 61 90 19
E-Mail business.manager@advanced-chemistry.com

Turkey

Epoks Kimyevi Ürünler San. Tic. Ltd. Sti.
34212 Güneşli / Bağcılar-İSTANBUL
Phone +90 21 24 74 87 48
E-Mail ali.kayalar@epoks.com.tr

United Kingdom

ebalta Distribution Limited
Arundel, West Sussex, BN18 0HY
Phone +44 77 85 57 36 12
E-Mail info@ebaltadistribution.co.uk

ebalta Kunststoff GmbH
Erlbacher Straße 100
91541 Rothenburg ob der Tauber
Germany

Phone: +49 9861 7007-0
Fax : +49 9861 7007-77
info@ebalta.de
www.ebalta.de

Mixing table RIM casting systems

Properties	Colour	Mixing ratio p.b.w.	Properties in volume	Pot life in sec.	Curing time in min.	Viscosity of mixture in mPas	*Shore D	*Flexural modulus of elasticity in Mpa	*Flexural strength in Mpa	*Flexural strength at breakage in %	Impact resistance (Charpy) in kJ/m ²	Heat resistance HDT °C	*TG in TMA TG in °C	
Semi rigid systems														
MG 400 / PUR 19	very low E-modulus, very high impact strength, low viscosity	black	100 : 80	100 : 69	50 – 60	20 – 30	750	74	630	28	7,6	n.b.*	n.a.	65
MG 475 / PUR 19	low E-modulus, very high impact strength, low viscosity	black	100 : 90	100 : 77	100 – 120	30 – 40	750	76	1050	43	7,2	n.b.*	n.a.	74
Hard systems														
MG 425 / PUR 19	high impact resistance, low viscosity	black	100 : 90	100 : 77	50 – 60	20 – 30	750	75	1550	62	6,8	80	73	80
MG 426 A / B	long potlife, high E-modulus	black	100 : 100	100 : 89	150 – 160	1,5 – 2 Std.	700	80	2185	85	7,0 n.b.*	42	95	n.a.
MG 453 A / B	short demoulding time, high heat resistant	black	100 : 75	100 : 66	55 – 66	10 – 15	n.a.	80	1640	65	7,4	38	102	124
Glassfibre systems														
MG 453 GF A / B	glassfibre filled, high heat resistance	black	100 : 60	100 : 61	55 – 60	10 – 15	n.a.	84	2510	90	6,2	18	108	124
Flame retardant systems														
MG 321 FR-S A / B	self-extinguishing, UL 94 V0 and 5 VA high heat resistance 120°C classification accord. to DIN 5510-2	black/natur	100 : 50	100 : 51	50 – 60	15 – 20	2000	80	2000	64	7,2	21	120	133
Lightly foaming systems														
MG 454 A / B	lightly foaming, density under 1, glassfibre filled	black	100 : 60	100 : 57	60 – 80	**5 – 15	n.a.	77	2100	57	6,3	11	95	107
Comp. A = Polyole; Comp. B = Isocyanate individual pot life and colours on enquiry n.b. non breaking* max. values will be reached after post curing according to the technical data sheets ** heated moulds (40-50 C°)														

Printed: 05/2017